


軸承支作尺寸圖

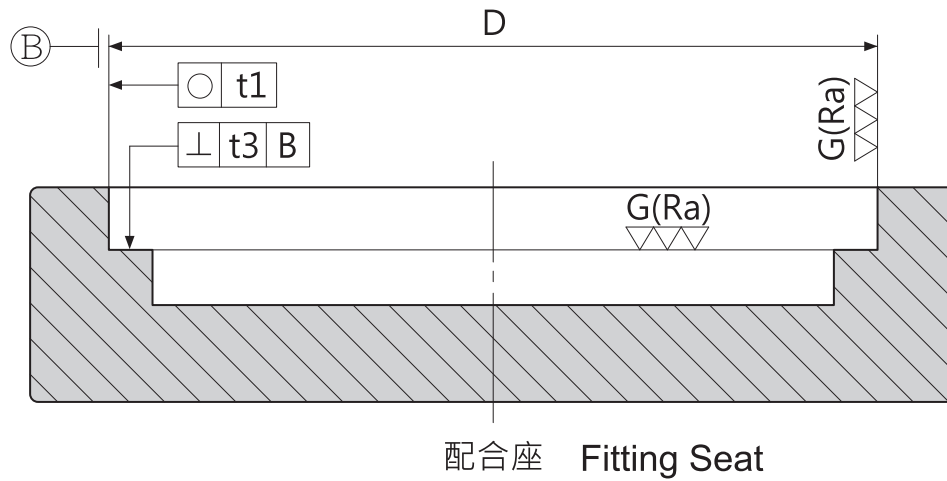

| 軸承型號 | 尺寸(D) | 上偏差 | 下偏差 | 真圓度(○) | 垂直度(⊥) | 表面粗度Ra |
|--------|-------|--------|--------|---------------------|---------------------|--------|
| | mm | mm | mm | t ₁ (μm) | t ₃ (μm) | (μm) |
| YRT50 | 126 | +0.01 | -0.005 | 4 | 3 | 0.8 |
| YRT80 | 146 | +0.01 | -0.005 | 4 | 3 | 0.8 |
| YRT100 | 185 | +0.01 | -0.005 | 4 | 3 | 0.8 |
| YRT120 | 210 | +0.01 | -0.005 | 4 | 3 | 0.8 |
| YRT150 | 240 | +0.01 | -0.005 | 4 | 3 | 0.8 |
| YRT180 | 280 | +0.013 | -0.005 | 4 | 3 | 0.8 |
| YRT200 | 300 | +0.013 | -0.005 | 4 | 4 | 0.8 |
| YRT260 | 385 | +0.015 | -0.005 | 5 | 5 | 0.8 |
| YRT325 | 450 | +0.015 | -0.005 | 5 | 5 | 0.8 |
| YRT395 | 525 | +0.015 | -0.005 | 5 | 5 | 0.8 |
| YRT460 | 600 | +0.015 | -0.005 | 5 | 5 | 0.8 |